

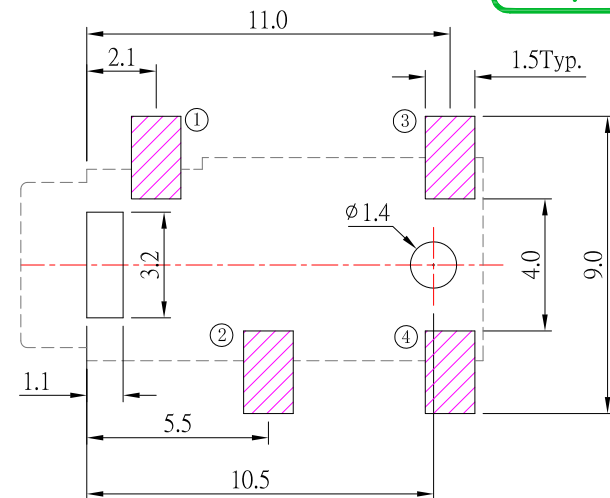
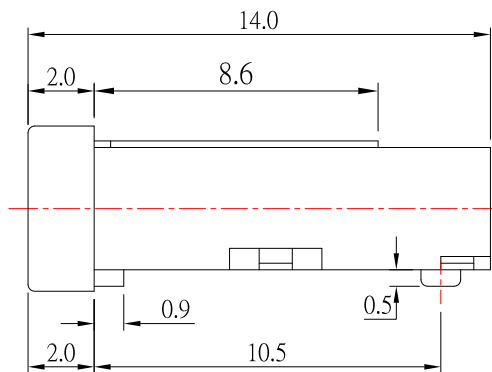
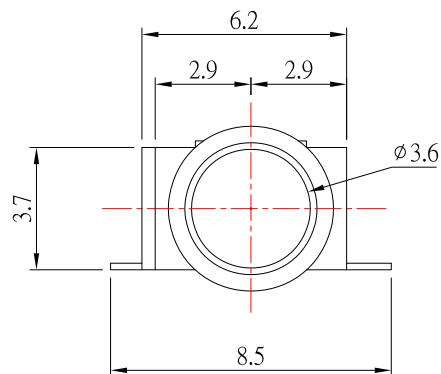


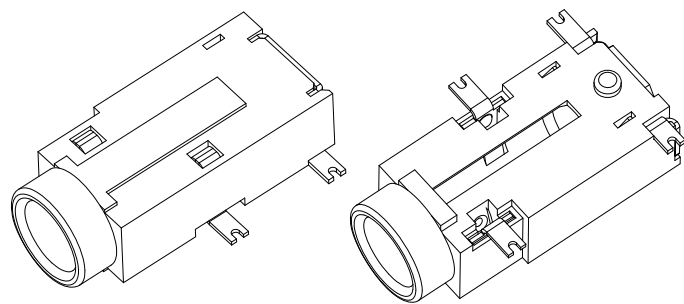

SCHEMATIC

PJ-3854D-S124	PJ-3853D-S124

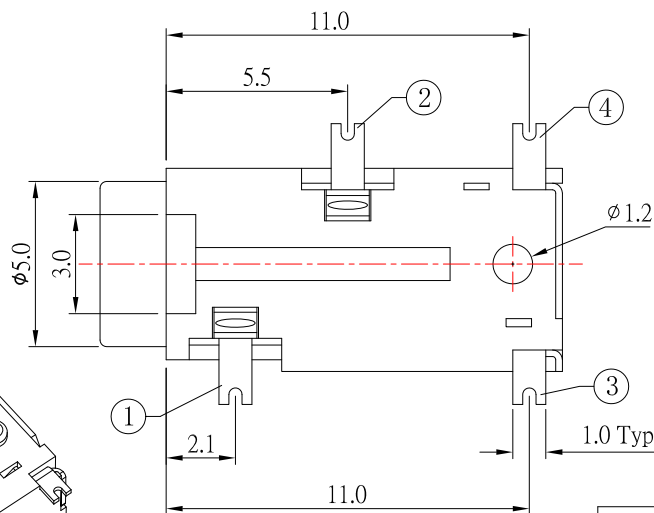

P.C.B LAYOUT TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 0.5A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

5	HOUSING	1	PA9T	
4	CONTACT FOOT	1	BRASS	Ag-Plating
3	CONTACT FOOT	1	SUS	Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
01/18/19
DATE
01/18/19
DATE
01/18/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
PHONE JACK
PJ-385xD-S124
PJ-385xD-S124

SIZE
A4
VER
R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新材質	Jack	011819