

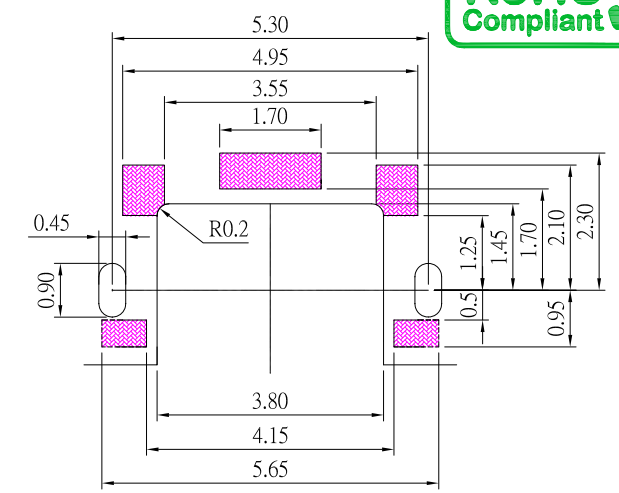
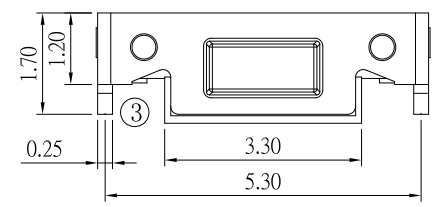


CIRCUIT DIAGRAM

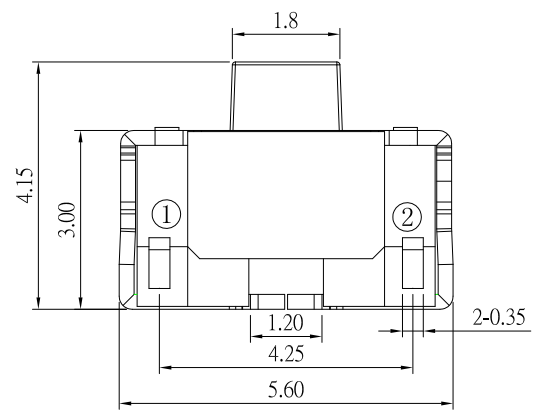

P.C.B LAND PATTERN



SPECIFICATIONS

Rating	0.05A 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	180 ± 30gf
Operating Life	100,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	THERMINAL	2	PHOSPHOR BRONZE	Ag plated
D	CONTACT	3	STAINLESS STEEL	Ag plated
C	COVER	1	PHOSPHOR BRONZE	
B	BASE	1	LCP	Black
A	STEM	1	LCP	Black

**CONTACT** 建倚科技股份有限公司  
**CONTACT TECHNOLOGY CORP.**

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 ~ 15 ±0.3  
 Above 15 ~ 30 ±0.4  
 Above 30 ~ 50 ±0.5  
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu  
 CHECKED BY: Jacky Chen  
 APPROVED BY: Tony Kao

DATE: 11/07/13  
 DATE: 11/07/13  
 DATE: 11/07/13

MAT'L: SWITCH  
 FINISH: TACT SWITCH  
 SCALE: 1 : 1  
 SHEET NO.: 1 of 1  
 TITLE: SWITCH  
 MODLE: TACT SWITCH  
 DWG NO.: TS-A28- 2-S246  
 PART NO.: TS-A28- 2-S246

ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE: A4  
 VER: R