





P.C.B LAYOUT
TOP VIEW

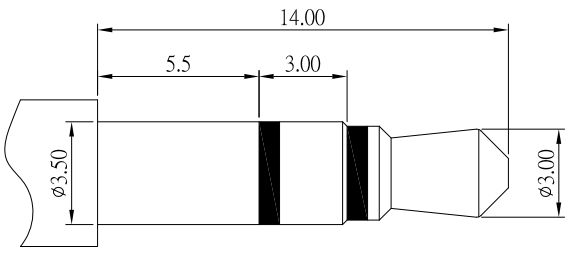

φ3.50mm 3 POLE PLUG

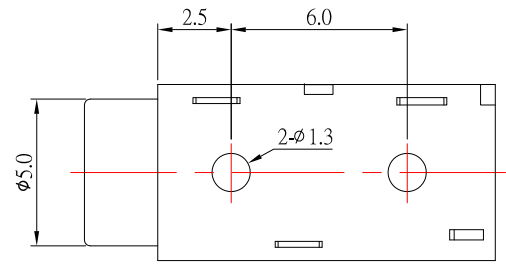

SCHMATIC

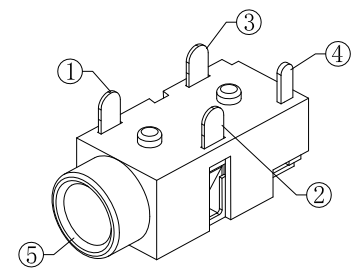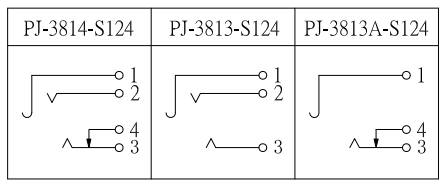

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : ≤ 30mΩ ;
- 3.Insulation resistance : ≥ 100MΩ ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑤	HOUSING	1	PA9T	
④	CURVE PIECE	1	BRASS	Ag-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
②	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu	DATE: 07/15/20	MAT'L	TITLE: JACK
CHECKED BY: Jacky Chen	DATE: 07/15/20	FINISH	MODLE: PHONE JACK
APPROVED BY: Tony Kao	DATE: 07/15/20	SCALE: 1 : 1	DWG NO. PJ-381x-S124
		SHEET NO. 1 of 1	PART NO. PJ-381x-S124

ITEM NO.	DESCRIPTION	DRAWN	DATE
4	更新尺寸及新增尺寸	Jack	071520
3	更新樣式	Jack	032619
2	更新尺寸及材質	Jack	072717
1	更新尺寸及更新為A0版	Jack	042817

SIZE: A4
VER: R4