


P.C.B LAYOUT
TOP VIEW
SCHEMATIC

PJ-3896D	PJ-3893AD	PJ-3893D	PJ-3894D	PJ-3895AD	PJ-3895BD

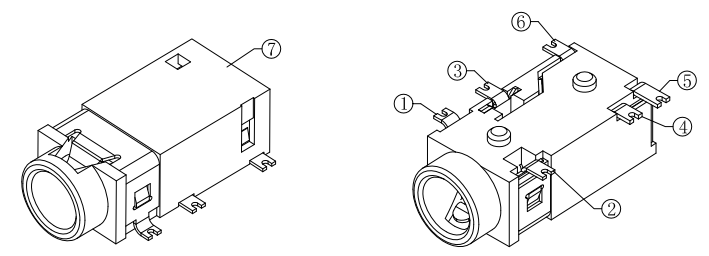

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PA9T	
6	6# CONTACT FOOT	1	BRASS	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : ≤30mΩ
3. Insulation resistance : ≥100MΩ
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles ◦

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/08/17			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	06/08/17			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-389xD-S124
Tony Kao	06/08/17	1 : 1		
		SHEET NO.	PART NO.	PJ-389xD-S124
		1 of 1		
			SIZE	A4
			VER	A1

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	新增插入示意图	Jack	060817
1	更新为A0版	Jack	031317