
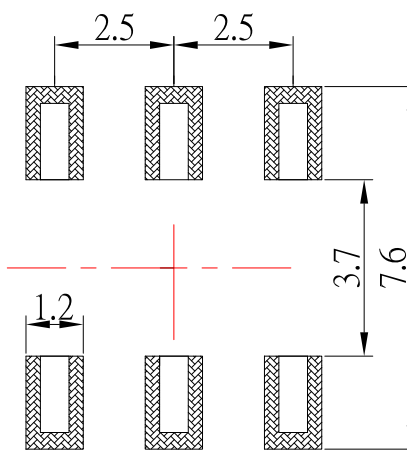


CIRCUIT DIAGRAM

NO	MODEL	KNOB(X)
1	SS-D35S	2.0 mm
2	SS-D35SA	3.0 mm
3	SS-D35SB	4.0 mm

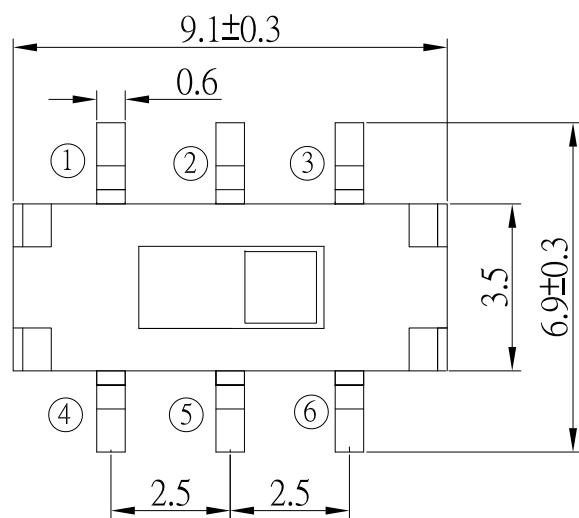

P.C.B LAND PATTERN

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 50gf
Operating Life	10,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BECU	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA6T	Black
A	SLIDER	1	PA46	Black

10	更新撥柄位置	Jack	030921
9	新增高度選項	Jack	032720
8	更新樣式	Jack	032719
7	新增Travel	Jack	052518
5	更新材質	Jack	022316
4	更新SPEC及更新為A0版	Jack	021916
3	更新材質	Jack	073014
2	新增高度選項及更新料號	Jack	040814
1	更新Rating	Jack	062813
ITEM NO.	DESCRIPTION	DRAWN	DATE



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/09/21		MODLE	SMT SLIDE SWICTH
CHECKED BY:	DATE	FINISH	SCALE	1 : 1
Jacky Chen	03/09/21		DWG NO.	SS-D35Sx-B-S246
APPROVED BY:	DATE	SHEET NO.	PART NO.	SS-D35Sx-B-S246
Tony Kao	03/09/21	1 of 1	SIZE	A4
			VER	R10