



P.C.B LAYOUT

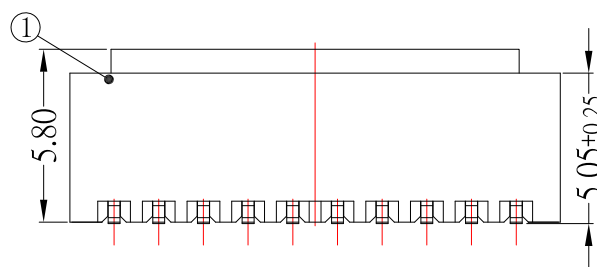

CKT	DIM A	DIM B	DIM C
2	1.50	3.35	4.46
3	3.00	4.85	5.96
4	4.50	6.35	7.46
5	6.00	7.85	8.96
6	7.50	9.35	10.46
7	9.00	10.85	11.96
8	10.50	12.35	13.46
9	12.00	13.85	14.96
10	13.50	15.35	16.46
11	15.00	16.85	17.96
12	16.50	18.35	19.46
13	18.00	19.85	20.96
14	19.50	21.35	22.46
15	21.00	22.85	23.96
16	22.50	24.35	25.46

SPECIFICATIONS

- 1.Current rating : 3.0A , AC / DC
- 2.Voltage rating : 350V, AC / DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Contact resistance : 20mΩ /Max

Material:

- 1.Housing : LCP
- 2.Contact : Brass,Tin over Nickel



建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/11/24
DATE: 04/11/24
DATE: 04/11/24

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: CONNECTOR
MODLE: WAFER P : 1.50mm SMT 180度
DWG NO.: WF-1500VSxx-S304
PART NO.: WF-1500VSxx-S304

SIZE: A4
VER: R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	041124