




P.C.B LAYOUT

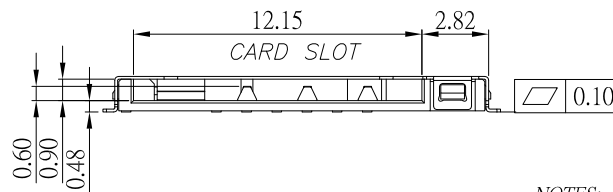

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



NOTES:

1) MATERIAL:

- 1.1 HOUSING: LCP
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: SUS

2) FINISH:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3) ELECTRICAL CHARACTERISTICS

- 3.1 RATING CURRENT: 1.0 A
- 3.2 RATING VOLTAGE: 30V
- 3.3 CONTACT RESISTANCE: 50 mΩ MAX
- 3.4 INSULATION RESISTANCE: 1000MΩ MIN
- 4.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- 4.6 OPERATING TEMPERATURE: -40°C ~ +85°C

CONTACT 建倚科技股份有限公司
CONTACT TECHNOLOGY CORP.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2	Above 5 ~ 15 ±0.3	Above 15 ~ 30 ±0.4	Above 30 ~ 50 ±0.5	Angle ±0.3	3RD. ANGEL'S	UNITS	MM
------------------------------------	--------------	-------------------	--------------------	--------------------	------------	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	06/03/24			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SIM CARD CONNECTOR
Jacky Chen	06/03/24			6+1PIN PUSH H1.50mm
APPROVED BY:	DATE	SCALE	DWG NO.	MSIM-150007-S267
Tony Kao	06/03/24	1 : 1		
SHEET NO.	1 of 1	PART NO.	MSIM-150007-S267	
				SIZE A4
				VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------